


PANEL CUTOUT  
MAX.PANEL THICKNESS  
10 MM

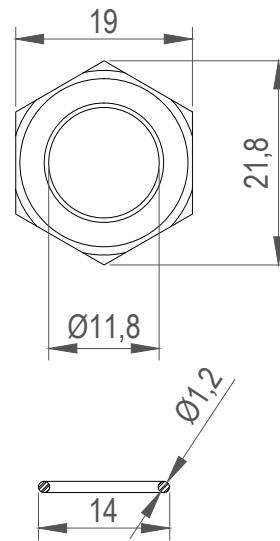

Seal Ring

#### SPECIFICATIONS:

1. Rating: 2A 36VDC.
2. Electrical Life:  $\geq 200,000$  cycles
3. Contact Resistance:  $\leq 50$  m $\Omega$
4. Insulation Resistance:  $\geq 1,000$  M $\Omega$
5. Dielectric Strength: 2,000V RMS 50Hz
6. Operating Temperature: -20°C ~ +55°C
7. Operating Force: 4N
8. Torque: 5~14Nm max. applied to nut
9. Contact Configuration: 1NO ( 1NC Made to order)
10. Operation Type: Momentary
11. The Front Shape: Domed
12. IP Class: IP65

#### MATERIALS:

1. Contact: Silver alloy
2. Button: Nickel Plated Brass or Stainless Steel
3. Base: PBT

Article:	OP16N-10 and OPN16R-10	
	Anti-vandal push button	
Opmerkingen:	www.vercoma.nl	
Getekend:	GS	Datum: 20-03-2015
<b>Vercoma Communicatie Systemen b.v.</b>		

